

Caratteristiche generali

- Classe 2 di resistenza al vento secondo la norma EN 13561 (600x315 cm)
- Tubo avvolgitore da 80 mm
- Braccio Home con DATSystem
- Manuale o motorizzata
- Regolazione micrometrica continua dell'inclinazione
- Disponibile con tettuccio protettivo
- Viteria Inox certificata italiana
- Certificazione TÜV Rheinland
- Design brevettato in tutti gli stati della UE

Klip


- Installazione a parete o soffitto
- Inclinazione da 5 a 65°
- Dimensione massima modulo singolo 700x365 cm
- Disponibile con sporgenza 415 cm con supporto XL e braccio Urban

Stein

- Installazione a parete o soffitto
- Inclinazione da 5 a 85°
- Dimensione massima modulo singolo 700x365 cm

Lunghezza del braccio e inclinazione - KLIP/STEIN

Arm lenght and inclination - KLIP/STEIN

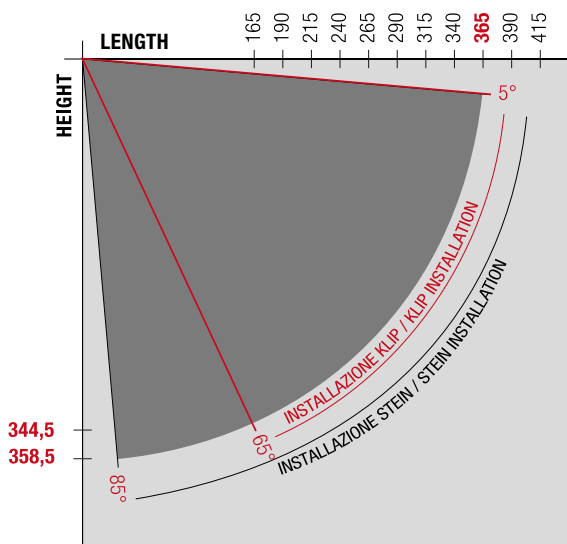

General features

- Class 2 wind resistance according to norm EN 13561 (600x315 cm)
- Roller tube 80 mm
- Arm HOME with DATSystem
- Manually operated or motorized
- Continuous micrometric regulation of inclination
- Available with protective hood
- Certified Italian Stainless steel screws and pins
- Certified by TÜV Rheinland
- Design patented in all EU Member States

Klip

- Wall or ceiling installation
- Inclination ranges between 5° and 65°
- Maximum sizes of a single section: 700x365 cm
- 415 cm projection also available with XL arm support and Urban arm


Stein

- Wall or ceiling installation
- Inclination ranges between 5° and 85°
- Maximum sizes of a single section: 700x365 cm

Dimensioni della tenda chiusa


Awning sizes with folded arms

Installazione a parete o a soffitto-KLIP
Wall or ceiling installation-KLIP

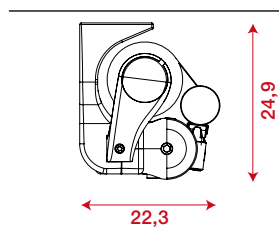


Inclinazione minima 5°
5° minimum inclination

Installazione a parete o a soffitto-KLIP
Wall or ceiling installation-KLIP

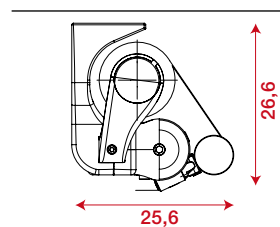


Inclinazione massima 65°
65° maximum inclination

Installazione a parete o a soffitto-STEIN
Wall or ceiling installation-Stein

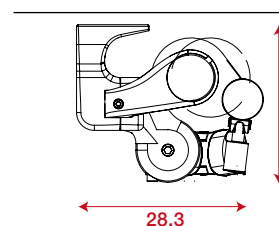

Inclinazione minima 5°
5° minimum inclination

Installazione a parete o a soffitto-STEIN
Wall or ceiling installation-Stein

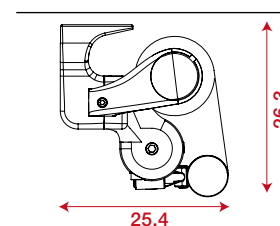

Inclinazione massima 85°
85° maximum inclination

Colori disponibili

Colours available

| | | | |
|--------------------|------------------|------------------|-----------------------|
| WHITE (RAL 9016) | IVORY (RAL 1013) | METAL (RAL 9006) | GRAPHITE SABLÉ (G900) |
| BLACK SABLÉ (N900) | SILVER SABLÉ | OX. TITANIUM | CORTEN |