



Caratteristiche generali


- Classe 2 resistenza al vento secondo la norma europea EN 13561
- Viteria Inox certificata italiana
- Installazione a parete o a soffitto
- Regolazione micrometrica continua dell'inclinazione
- Inclinazione da 0° a 90°
- Tubo avvolgitore da 80mm
- Braccio Fusion con DATSystem
- Dimensione massima modulo singolo 700x315 cm
- Manuale o motorizzata
- Disponibile con tettuccio protettivo

General features

- Class 2 wind resistance according to norm EN 13561
- Certified Italian Stainless steel screws and pins
- Wall and ceiling installation
- Continuous micrometric regulation of inclination
- Inclination ranges between 0° and 90°
- Roller tube 80 mm
- Arm FUSION with DATSystem
- Maximum sizes of a single section: 700x315 cm
- Manually operated or motorized
- Available with protective hood

Lunghezza del braccio e inclinazione


Arm length and inclination

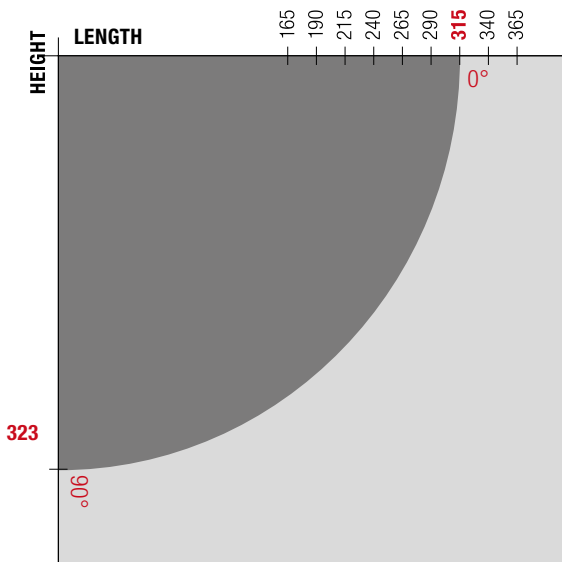

Dimensioni della tenda chiusa

Awning sizes with folded arms

Installazione a parete o soffitto
Wall or ceiling installation

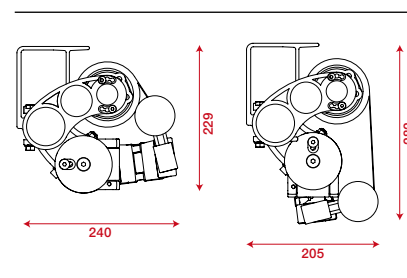

Colori disponibili

Colours available

| | | | |
|--------------------|------------------|------------------|-----------------------|
| WHITE (RAL 9016) | IVORY (RAL 1013) | METAL (RAL 9006) | GRAPHITE SABLÉ (G900) |
| BLACK SABLÉ (N900) | SILVER SABLÉ | OX. TITANIUM | CORTEN |