

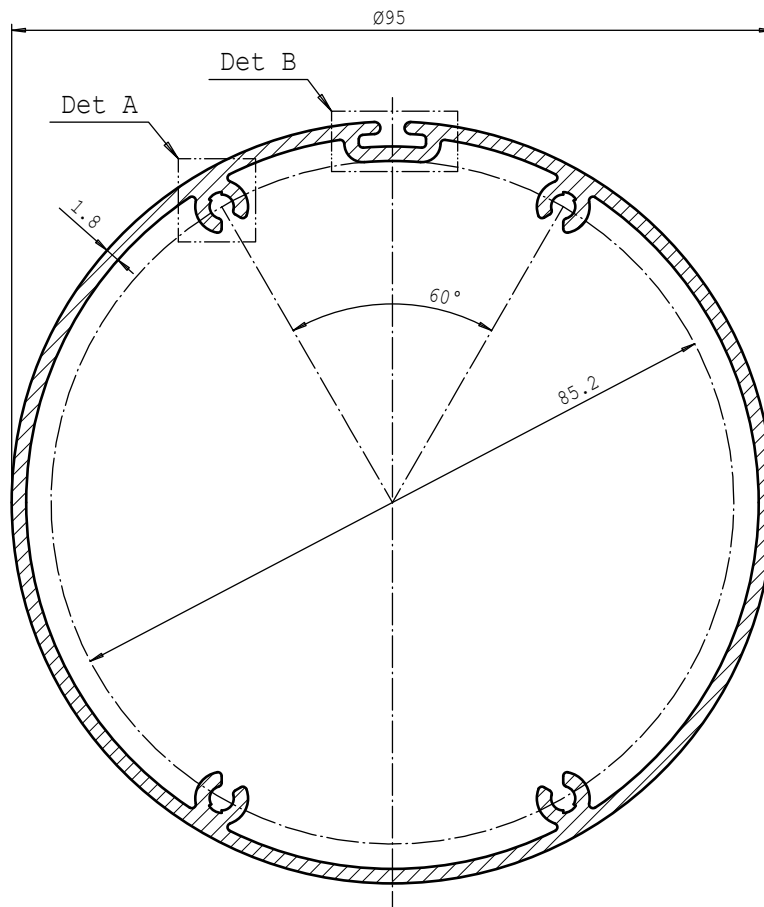




SFS-EN 755-9 GROUP I		
CD ≤ 100		
Dim/mm	Toler.	±mm
(0) - 10		0.25
(10) - 25		0.30
(25) - 50		0.50
(50) - 100		0.70

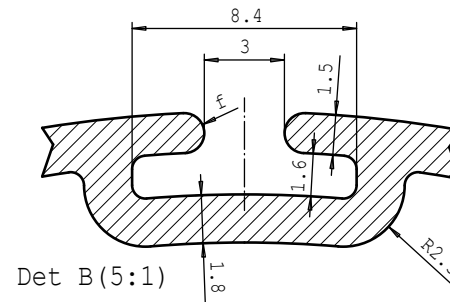

Det A (5:1)
4 pcs



Det B (5:1)

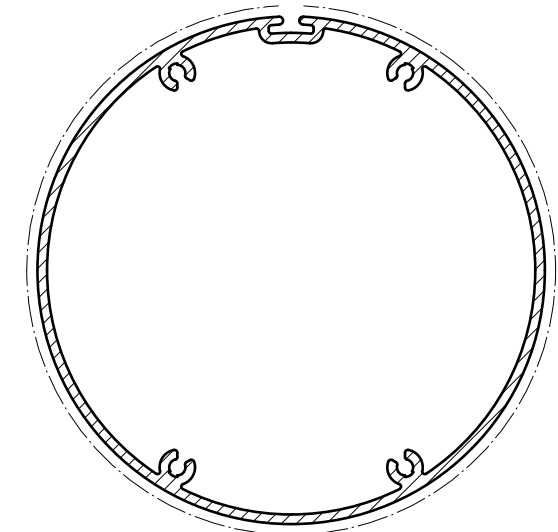

Ix	72.66 cm ⁴	Wallthickn.	1.8 mm	Asiakas/Customer	Arvomarkiisi Oy	Bolster	B-44		
Iy	61.48 cm ⁴	Radius	0.5 mm	Radius	A= B= C=	Die DIA	Ø 230		
Wx	14.95 cm ³	CD	95 mm	Asiakk.piiir./Custom.draw nr		Piirt./Draw by	HPO		
Wy	12.94 cm ³	Ala/Area	633 mm ²	Käyttötarkoitus/Application	95mm putki	Päivä/Date	2020-03-03	Date	Name
Perim. (in)	369 mm	Perim. (out)	313 mm	Tolerance	EN 755-9	Suhde/Scale	1.5 : 1	Changing	
PUR.SUHDE	54.7	g/m	1709	Pintalaatu luokka	Surface Quality 4	SEOS/ALLOY	EN-AW 6060 T6	Tarj.piiir. nr/Quotation draw.	
								Ale-00988 Rev. 2	
								Prof. nr /Section	
								17422 Rev.	